

Enabling Switch

S2DF001

Part Number



- One-hand operation thanks to ergonomic design
- Rubberized enabling switch


The 3-stage enabling switch is very well suited to extensive commissioning or service work thanks to the special design. The ergonomic design prevents fatigue and makes work easier.

Technical Data


Electrical Data	
Temperature Range	-5...60 °C
Mechanical Data	
Housing Material	Plastic
Service Life	1000000 Switching Cycles
Degree of Protection	IP54
Connection	Prewired
Cable Length	5 m
Safety-relevant Data	
B10d Switching Cycles	100 000
Changeover Contacts	3
Function	
3-stage	yes
Connection Diagram No.	861
Control Panel No.	FP2
Suitable Mounting Technology No.	840

Complementary Products

Safety Relay SR4B3B01S
Safety Relay SR4D3B01S
Sistema Library software DNNF007

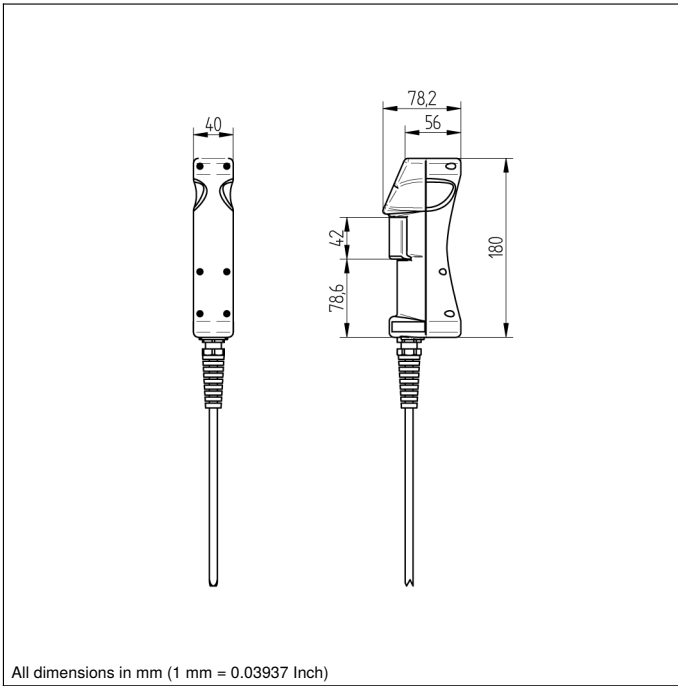

Ctrl. Panel



93 = Confirmation key