

Reflex Sensor with Background Suppression

YK12PA7 LASER

Part Number




- Detection range of up to 120 mm
- High switching frequency
- Low current consumption < 15 mA
- Miniature design

Technical Data


Optical Data	
Range	120 mm
Adjustable Range	18...120 mm
Switching Hysteresis	< 10 %
Light Source	Laser (red)
Wave Length	655 nm
Service Life (T = +25 °C)	100000 h
Laser Class (EN 60825-1)	2
Max. Ambient Light	10000 Lux
Spot Diameter	see Table 1
Electrical Data	
Supply Voltage	10...30 V DC
Current Consumption (U _b = 24 V)	< 15 mA
Switching Frequency	1900 Hz
Response Time	263 μs
Temperature Drift	< 5 %
Temperature Range	-25...60 °C
Switching Output Voltage Drop	< 2,5 V
PNP Switching Output/Switching Current	100 mA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Protection Class	III
FDA Accession Number	0820358-000
Mechanical Data	
Setting Method	Potentiometer
Housing Material	Plastic
Full Encapsulation	yes
Degree of Protection	IP67
Connection	M8 × 1; 4-pin
PNP NO/NC antivalent	●
Connection Diagram No.	101
Control Panel No.	K4
Suitable Connection Technology No.	7
Suitable Mounting Technology No.	400

These sensors detect distance by measuring angles. They are particularly good at recognizing objects in front of any background. The color, shape and surface characteristics of the object have practically no influence on sensor switching performance.

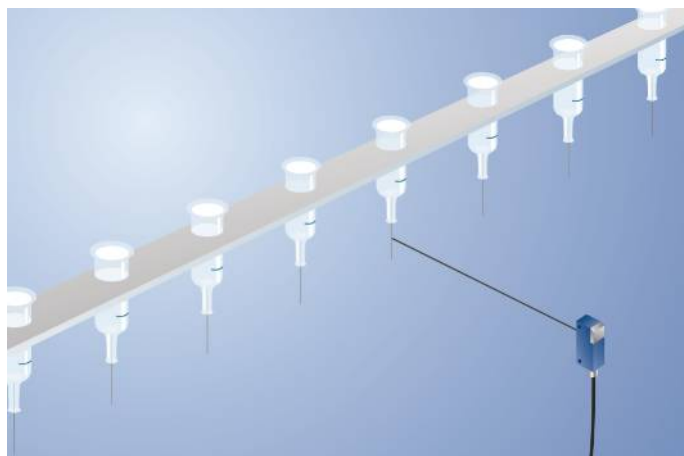


Complementary Products


PNP-NPN Converter BG7V1P-N-2M

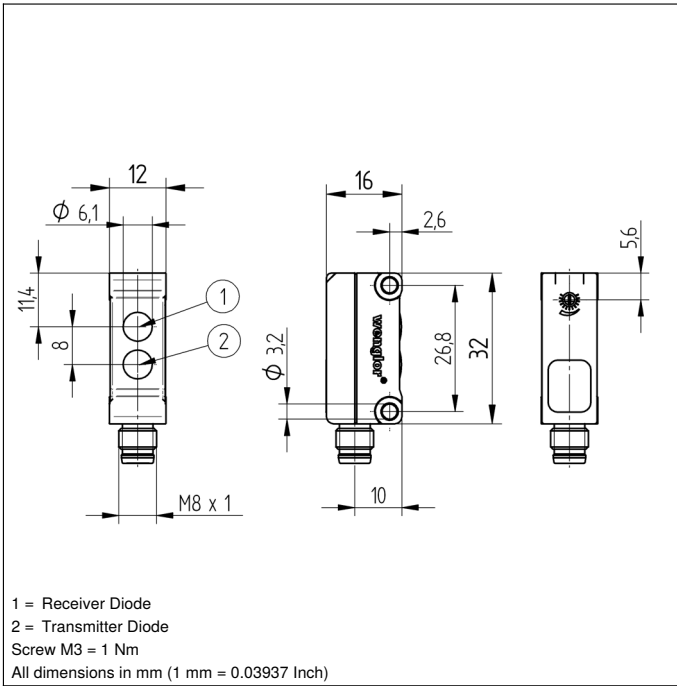

Ctrl. Panel

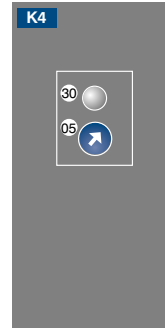

05 = Switching Distance Adjuster
 30 = Switching Status/Contamination Warning

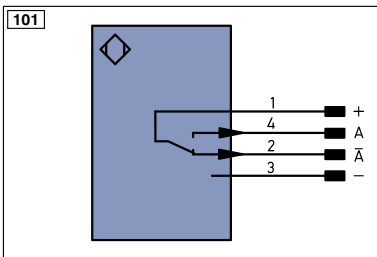

Legend

+	Supply Voltage +	nc	not connected	ENa	Encoder A
-	Supply Voltage 0 V	U	Test Input	ENb	Encoder B
~	Supply Voltage (AC Voltage)	U	Test Input inverted	AMIN	Digital output MIN
A	Switching Output (NO)	W	Trigger Input	AMAX	Digital output MAX
Ā	Switching Output (NC)	O	Analog Output	AOK	Digital output OK
V	Contamination/Error Output (NO)	O-	Ground for the Analog Output	SY In	Synchronization In
ṽ	Contamination/Error Output (NC)	BZ	Block Discharge	SY OUT	Synchronization OUT
E	Input (analog or digital)	AW	Valve Output	Out	Brightness output
T	Teach Input	a	Valve Control Output +	M	Maintenance
Z	Time Delay (activation)	b	Valve Control Output 0 V		
S	Shielding	SY	Synchronization		
RxD	Interface Receive Path	E+	Receiver-Line		
TxD	Interface Send Path	S+	Emitter-Line		
RDY	Ready	±	Grounding		
GND	Ground	SnR	Switching Distance Reduction		
CL	Clock	Rx+/-	Ethernet Receive Path		
E/A	Output/Input programmable	Tx+/-	Ethernet Send Path		
	IO-Link	Bus	Interfaces-Bus A(+)/B(-)		
PoE	Power over Ethernet	La	Emitted Light disengageable		
IN	Safety Input	Mag	Magnet activation		
OSSD	Safety Output	RES	Input confirmation		
Signal	Signal Output	EDM	Contactor Monitoring		
Bl_D+/-	Ethernet Gigabit bidirect. data line (A-D)	ENAR5422	Encoder A/Ā (TTL)		
EN0R5422	Encoder 0-pulse 0-0 (TTL)	ENBR5422	Encoder B/B̄ (TTL)		

Wire Colors according to DIN IEC 757


BK	Black
BN	Brown
RD	Red
OG	Orange
YE	Yellow
GN	Green
BU	Blue
VT	Violet
GY	Grey
WH	White
PK	Pink
GNVE	Green/Yellow

Table 1

Detection Range	40 mm	80 mm	120 mm
Spot Diameter	1,5 mm	1 mm	2 mm

Switching Distance Deviation

Typical characteristic curve based on Kodak white (90 % remission)

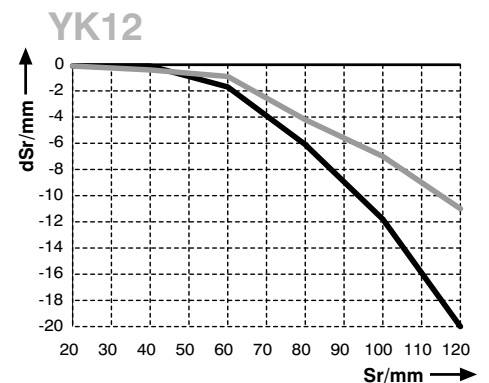

Sr = Switching Distance
 dSr = Switching Distance Change
 — black 6 % remission
 — grey 18 % remission

